




// FEATURES

- ❖ The SlimTag is used for identification in System 3060 to operate locking cylinders, SmartHandles, SmartRelays and SmartLocker.
- ❖ Manage up to 32,000 locks and open doors and gates with a SlimTag.
- ❖ MIFARE® DESFire® SlimTags are used in System 3060. This is particularly advantageous when a company already has cards which are used as a company ID or for time-and-attendance recording, for example.

// DIMENSIONS

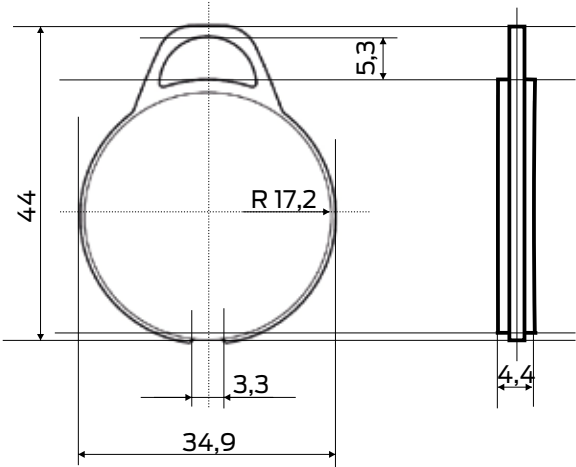

Measurements indicated in mm

// TECHNICAL DATA

Material	White plastic (polycarbonate)	Antenna	Wire coiled
Surface finish	White plastic (polycarbonate)	Number of locking devices which can be managed per SlimTag	Up to 32,000, depending on configuration
Dimensions	44.0 x 34.9 x 4.4 mm (L x W x H)	Service life (chips)	min. 10 years
Protection rating	IP67	RFID function	ISO 14443A
Read range	Depends on reader		
Temperature range	- 25 °C to +70 °C		

PD.SlimTag.EN – 2023.01